Talia

19 203 Thermostatic Roman Tub Filler

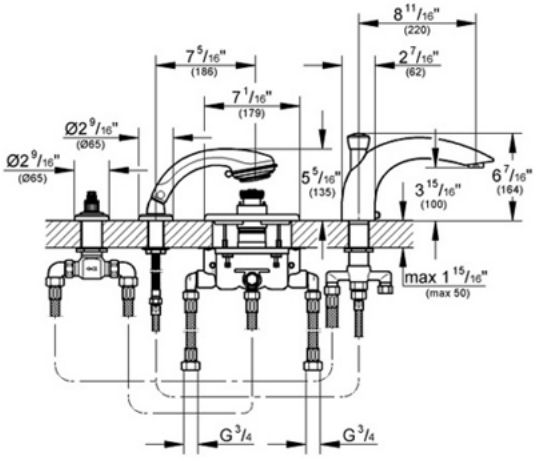

Description

4-hole deck-mount installation
3/4" thermostatic mixing valve
GROHE TurboStat® Technology
GROHE SilkMove® ceramic cartridge
8 3/4" diverter spout
Relexa Plus Champagne hand shower
79" hand shower hose
Volume control included
Flexible stainless steel braided hoses
Service stops

Sold less handles.
Shown with Volo lever handle (19 295) and lever handles (19 202). These handles are exclusive to the thermostatic tub filler.

Flow Rate

8 gpm at 45 psi (thermostat valve)
2.5 gpm at 80 psi (hand shower)

Code Compliance

ASME/ANSI A112.18.1M
ASSE Standard 1016

Finish Options

19 203 OOO Starlight® Chrome
19 203 RRO Velour Chrome
19 203 ENO Infinity Brushed Nickel

GROHE America, Inc 241 Covington Drive, Bloomingdale, IL 60108 630-582-7711 Fax:630-582-7722
GROHE Canada, Inc 1226 Lakeshore Road East, Mississauga, Ontario Canada L5E 1E9 905.271.2929 Fax:905.271.9494