


21 059 Thermostatic Roman Tub Filler

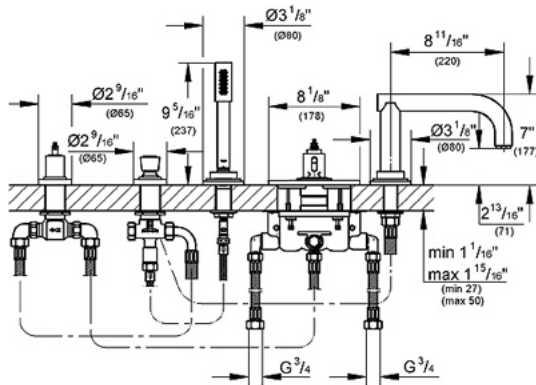

Description

-LIMITED AVAILABILITY-

- 5-hole deck-mount installation
- $\frac{3}{4}"$ thermostatic mixing valve
- $8\frac{3}{4}"$ spout
- Sena hand shower
- 79" hand shower hose
- Volume control included
- GROHE TurboStat® Technology
- GROHE SilkMove® ceramic cartridge
- Flexible stainless steel braided hoses
- Service stops

Sold less handles. Shown with both Trio spoke handles (21 072) and lever handles (21 073). These handles are exclusive to the thermostatic tub filler.

Flow Rate

- 8 gpm at 45 psi (thermostat valve)
- 2.5 gpm at 80 psi (hand shower)

Code Compliance

- ASME/ANSI A112.18.1M
- ASSE Standard 1016

Finish Options

- 21 059 OOO Starlight® Chrome
- 21 059 AVO Infinity Satin Nickel
- 21 059 BEO Sterling Infinity Finish
- 21 059 ENO Infinity Brushed Nickel