

36 072 Concealed Thermostat Unit



Description

-AVAILABLE ONLY THROUGH AUTHORIZED GROHE ONDUS SHOWROOMS-

Concealed installation

For use with digital bath/shower solutions: 27 198, 36 056, 36 057, 36 059


2 inlets - hot and cold 1/2" NPT

3 outlets - 1/2" NPT

GROHE TurboStat® thermostat cartridge

Plug power supply 120 V AC / 6 V DC incl. cable protection and cables

Brass construction

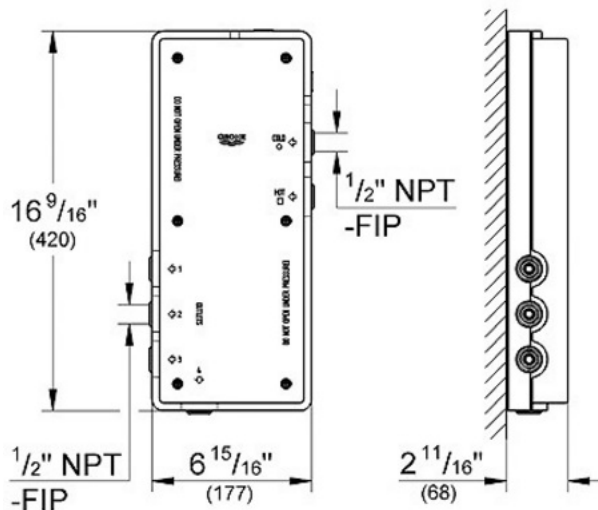

Flow Rate

13.5 gpm max Flow utilizing 3 outlets, 9 gpm max flow utilizing one outlet

Code Compliance

ASME/ANSI A112.18.1M

Finish Options

36 072 000 Rough-In